


OVER-GLASS AND UNDER-GLASS AWNING

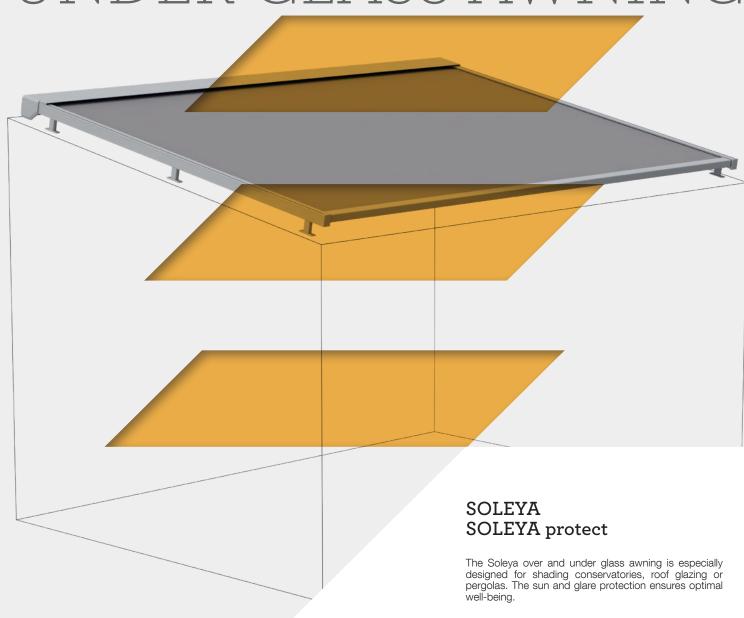

SOLEYA SOLEYA protect


THE OVER-GLASS AND UNDER-GLASS AWNING

Product design

- Single installation, combination/linkage and in-line installation are possible
- Available fabrics: Acrylic, polyester, and SOLTIS 92/96
- Motor drive with a 0.5 m cable and plug
- Optional radio control with ONYX or Somfy io
- Double guide rail possible for the over-glass option
- Optional in the under-glass option: Integrated LEDs in the box profile and in the guide rails with ONYX or Somfy IO control possible
- Additional guide tubes are possible for the over-glass variant, depending on width and projection
- Simple mounting with good revision possibilities
- Heat protection
- Glare protection
- Sight screen
- Energy-saving with air conditioning systems in the summer
- Optimum tensioning of the cover due to the counter tension system
- High durability and easy operation
- UV-protection for sensitive interior design



LED in the box and the guides



SOLEYA/SOLEYA protect Cassette 253 mm x 156 mm.

Field of application and use

Shading with counterdraught for installation on slanted glazing. Perfect for sun protection for conservatories, roof glazing and pergola-type structures.

SOLEYA

Fabric gap between guide rail and curtain

Wind protection class 2

SOLEYA protect

No fabric gap between guide rail and curtain (fabric gap-free, side seam guided)

Wind protection class 3





Underglass awning



SOLEYA/SOLEYA protect Front rail



SOLEYA/SOLEYA protect Guide rail 55 x 77 mm Double guide rail 114 x 77 mm

Limit sizes [mm]	SOLEYA	SOLEYA protect
Min. width	1420	1420
Max. width	6000	6000
Max. sloping projection	6500	6000
Max. surface [m²]	30	26



