

HELLA

AWNINGS



VIVA 7040
VIVA plus 7040
VIVA super 7040

The new awning generation VIVA 7040 promises perfect protection against the sun. Modern colours, a variety of patterns and upmarket quality create a pleasant mood.

VIVA 7040
 VIVA plus 7040
 VIVA super 7040


CREATE YOUR FREE SPACE

The awning VIVA 7040 adapts to any architecture and provides many extras. VIVA plus 7040 protects the cover with a roof profile and VIVA super 7040 additionally with a fabric receptacle.


02/2018 7540 0129_EN




Awning VIVA super 7040, with Varioplus roller blind

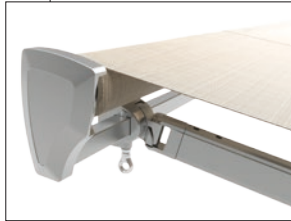

Open awning VIVA 7040

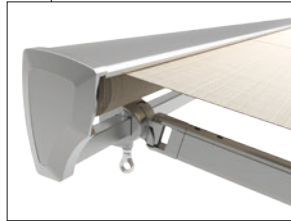

Awning VIVA plus 7040 with roof profile

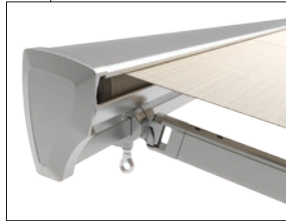

Awning VIVA super 7040 with upper covering profile and fabric tray profile




Folding arm with hidden high-strength pull cord optional with integrated LED lighting

Valance


Valance no. 1 Valance no. 2 Valance no. 3 Valance no. 4 Valance no. 5




Awning VIVA super 7040 retracted, without valance

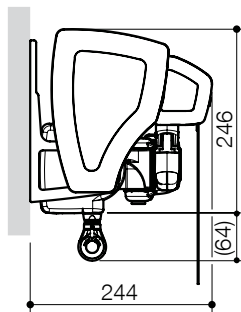

Wall installation

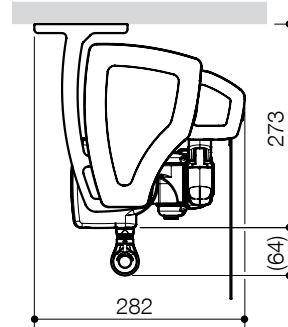

Ceiling installation

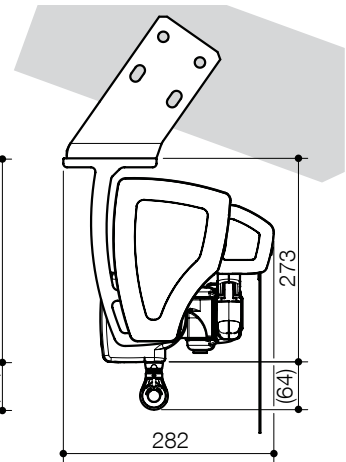

Rafter installation

Awning VIVA super 7040, with arm covering profile

Design	Folding arm	Highly-loaded hinges	Inclination	Varioplus roller blind with single units: (please observe limiting sizes!)	Can be linked	Valance	Fixing	
Cartridge	High-strength pull cord	Aluminium drop forged	0° – 40°	Surcharge	Surcharge	Included in the delivery	Wall bracket (on concrete I): included in the delivery Ceiling bracket: surcharge Rafter bracket: surcharge	
Maximum construction dimensions with sloping projection [mm]			1500	2000	2500	3000	3500	4000
Minimum width								
Design maxima (LED)			1490	1740	1990	2240	2490	2740
Single unit crank handle 2 arms			2070	2570	3070	3570	4070	-
Single unit motor 2 arms			1980	2480	2980	3480	3980	4670
Single unit motor 2 arms LED + Variotronic			2370	2870	3370	3870	4370	5060
Single unit motor 3 arms			2940	3690	4440	5190	5940	6970
Single unit motor 4 arms			3900	4900	5900	6900	-	-
Linked unit motor 4 arms			4040	5040	6040	7040	8040	9340
Linked unit motor 6 arms			5950	7450	8950	10450	11950	13940
Maximum width								
Single unit			7000	7000	7000	7000	7000	7000
Linked unit			14000	14000	14000	14000	14000	14000

Subject to modifications.