

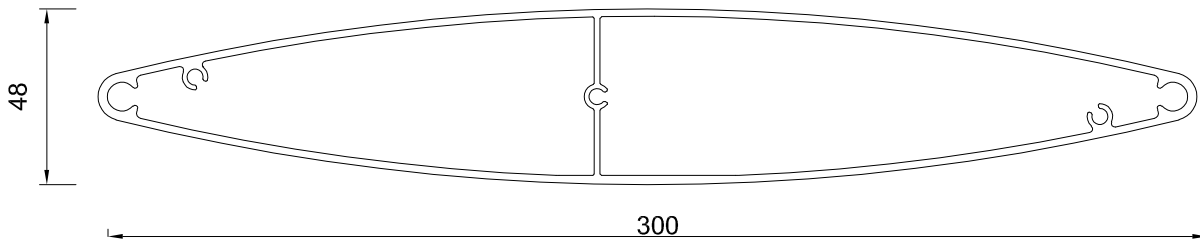



Endcaps for STB 300



Simple endcaps




Angle endcaps (0-90°) for mounting profiles in front of the supporting construction

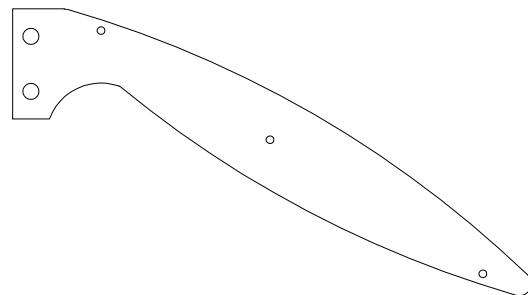


Angle endcaps (0-90°)

for mounting profiles in front of the supporting construction

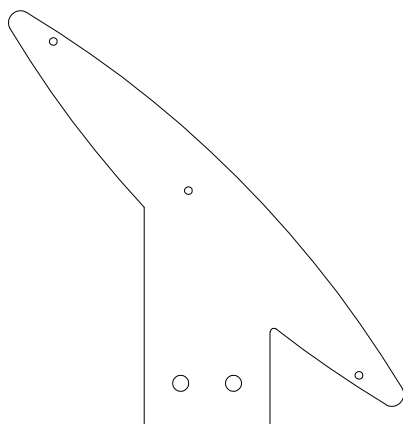

Angle endcaps (0-90°)

to install profiles in the axis of the supporting construction

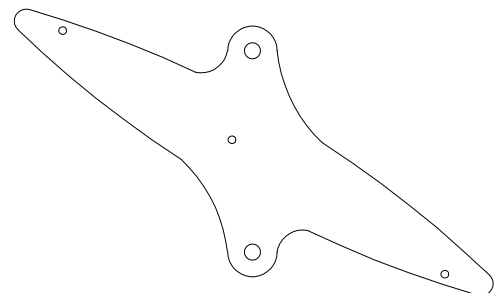

PRODUCT DATA SHEET FOR AIRFOIL LOUVRE – STB 300

Profile pressed from aluminium alloy: grade 6060 or 6030 Condition T66 or T6

In accordance with PN-EN 755-9

Tolerance U.N.E. PN-EN 12020-2

Mechanical properties according to PN-EN 755-2

Chemical composition in accordance with the PN-EN 573-3 standard

Surface quality: Polyester powder coating in all RAL colours 60-80 µm, wood effect, Anodising 15-20 µm, mill finish

Maximum span between supports for STB 300- 3.00 m

Standard lengths of profiles: 6,0 m

Other dimensions 4 - 7 m on request

MODIFICATION DATE
08.2018