




ST 40V

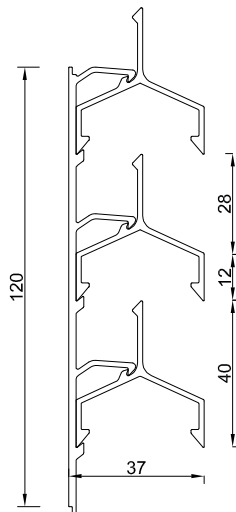

ST 40VG



ST 40V

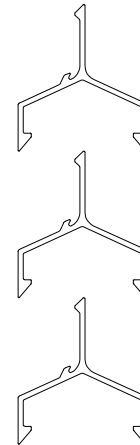

AIR FLOW 32.5 %

VISUAL SECTION 0%

PRODUCT DATA SHEET FOR TYPE Z PROFILES – ST 40V

Profile pressed from aluminium alloy: grade 6060 or 6030 Condition T66 or T6

In accordance with PN-EN 755-9

Tolerance U.N.E. PN-EN 12020-2

Mechanical properties according to PN-EN 755-2

Chemical composition in accordance with the PN-EN 573-3 standard

Surface quality: Polyester powder coating in all RAL colours 60-80 µm, wood effect, Anodising 15-20 µm, mill finish

Width of the grips: standard 30 mm, double 60 mm

Maximum span between supports for ST 40V- 1.20 m

Standard lengths of profiles: 6,0 m

Other dimensions 4 - 7 m on request

MODIFICATION DATE
10.2018