

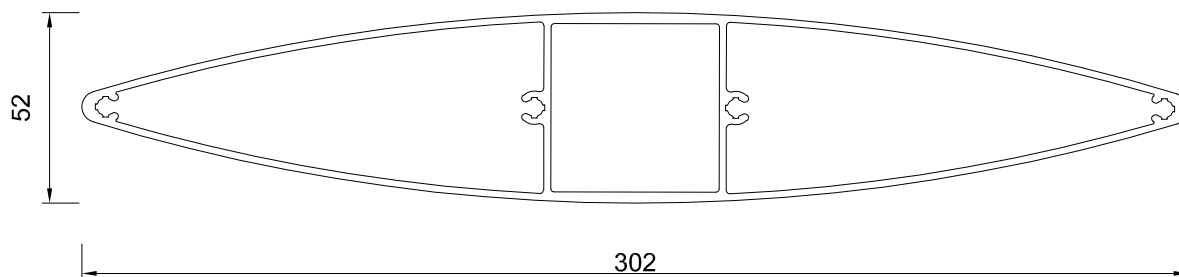


# Endcaps for ST 300




Simple endcaps




Angle endcaps (0-90°)

for mounting profiles in front of the supporting construction

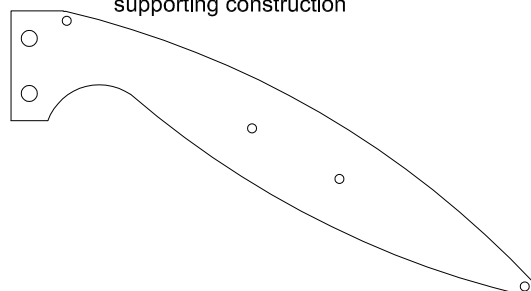


Angle endcaps (0-90°)

for mounting profiles in front of the supporting construction

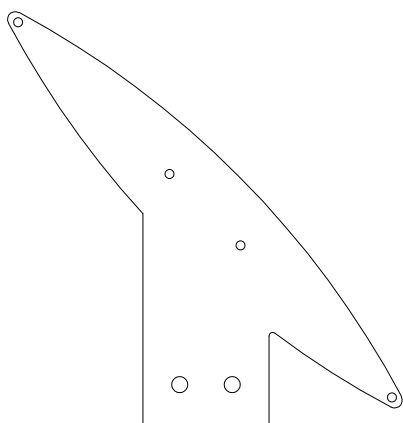

Angle endcaps (0-90°)

to install profiles in the axis of the supporting construction

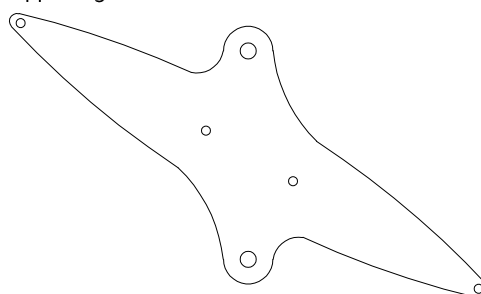

## PRODUCT DATA SHEET FOR AIRFOIL LOUVRE – ST 300

Profile pressed from aluminium alloy: grade 6060 or 6030 Condition T66 or T6

In accordance with PN-EN 755-9

Tolerance U.N.E. PN-EN 12020-2

Mechanical properties according to PN-EN 755-2

Chemical composition in accordance with the PN-EN 573-3 standard

**Surface quality:** Polyester powder coating in all RAL colours 60-80 µm, wood effect, Anodising 15-20 µm, mill finish

Maximum span between supports for ST 300- 3.30 m

**Standard lengths of profiles:** 6,0 m

Other dimensions 4 - 7 m on request

MODIFICATION DATE  
10.2018