

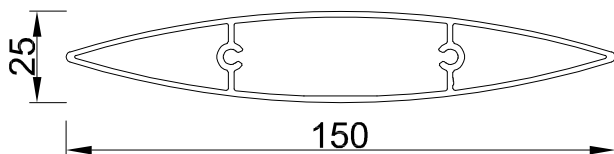



# Profile ST 150




U0/ST 150

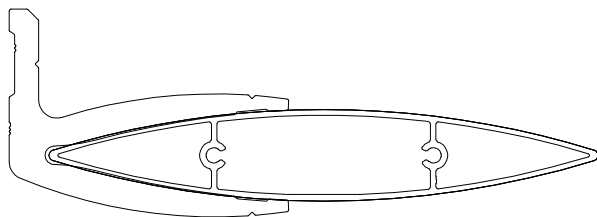


U15/ST 150

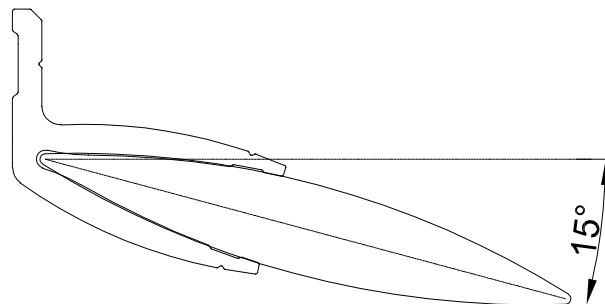

U30/ST 150

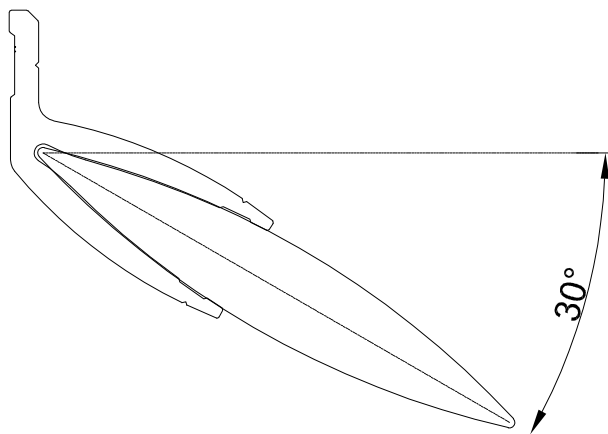

U45/ST 150

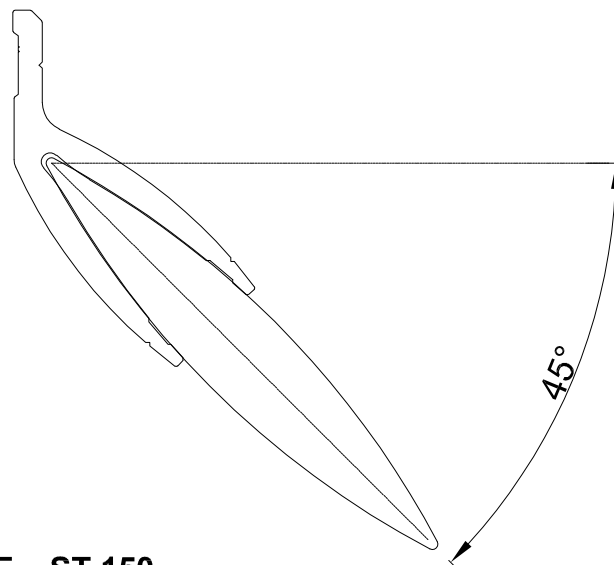

## PRODUCT DATA SHEET FOR AIRFOIL LOUVRE – ST 150

Profile pressed from aluminium alloy: grade 6060 or 6030 Condition T66 or T6

In accordance with PN-EN 755-9

Tolerance U.N.E. PN-EN 12020-2

Mechanical properties according to PN-EN 755-2

Chemical composition in accordance with the PN-EN 573-3 standard

**Surface quality:** Polyester powder coating in all RAL colours 60-80  $\mu\text{m}$ , wood effect, Anodising 15-20  $\mu\text{m}$ , mill finish

Maximum span between supports for ST 150- 2.50 m

**Standard lengths of profiles:** 6,0 m

Other dimensions 4 - 7 m on request

MODIFICATION DATE  
08.2018