

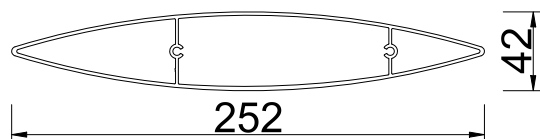



Profile ST 250 ECONOMY and Brackets




DUO/ST 250 ECONOMY

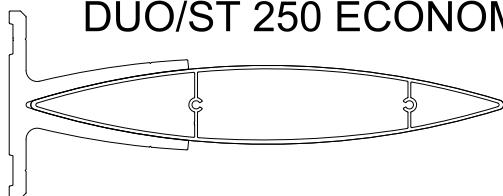


U0/ST 250 ECONOMY

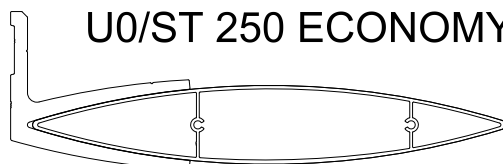


U15/ST 250 ECONOMY

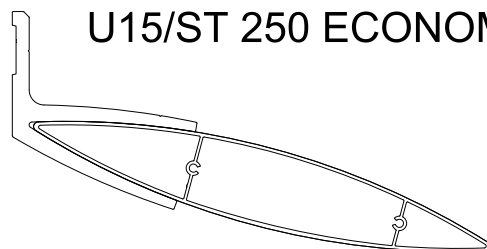

U30/ST 250 ECONOMY

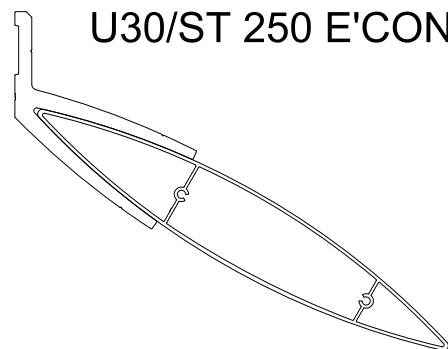

U45/ST 250 ECONOMY

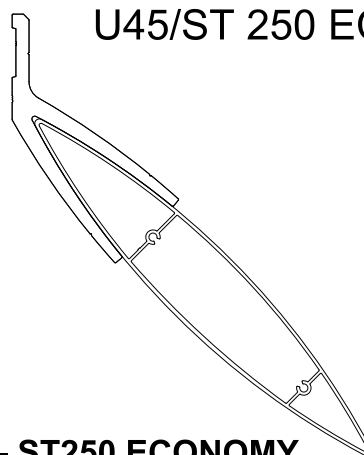

PRODUCT DATA SHEET FOR AIRFOIL LOUVRE – ST250 ECONOMY

Profile pressed from aluminium alloy: grade 6060 or 6063 Condition T66 or T6

In accordance with PN-EN 755-9

Tolerance U.N.E. PN-EN 12020-2

Mechanical properties according to PN-EN 755-2

Chemical composition in accordance with the PN-EN 573-3 standard

Surface quality: Polyester powder coating in all RAL colours 60-80 µm, wood effect, Anodising 15-20 µm, mill finish

Maximum span between supports for ST250 ECONOMY- 3.00 m

Standard lengths of profiles: 6,0 m

Other dimensions 4 - 7 m on request

MODIFICATION DATE
01.2020