



Awning SUNNA


Technical data	
Colour	White, silver, brown, anthracite
Electric drive	YES
Manual drive	YES
Maximum width	7.0 m
Maximum depth	3.5 m
Cassette	NO
Angle of inclination	0° - 85° (wall), 0° - 85° (ceiling)
Minimum width	3.048 m
Acrylic fabrics	10 different + 6 waterproof
Green® fabrics	2
Valance	YES
Tube diameter	78 mm
Arms	Bending arms with a chain
Manual control	Available length of the crank: 1.6 m
Automatic control	Motor, motor with an emergency opening, remote control, wind sensor

SPECIFICATIONS

Exceptionally strong awning SUNNA – indeed, a strong and striking combination of elegance and durability. This awning is a perfect solution for bigger terraces and commercial objects. The awning is perfect for cafe spaces, and the private terrace will be protected from both sunlight and curious stares of passers-by


Arm hinge joints crafted with precision and chains connecting them ensure durability and reliable operation of the awning. The construction of the awning is extremely easy to assemble, it is powder-coated, therefore it is resistant to scratches and corrosion.

Available colours of the construction: white, silver, brown or anthracite.

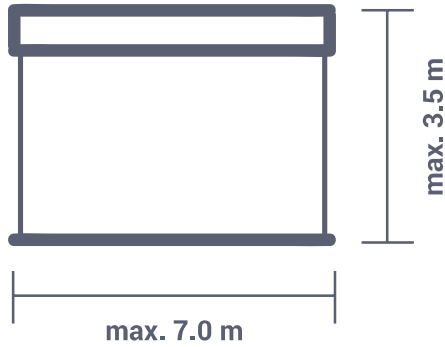


0° - 85° Installation to the wall
0° - 85° Installation to the ceiling

Installation to the wall

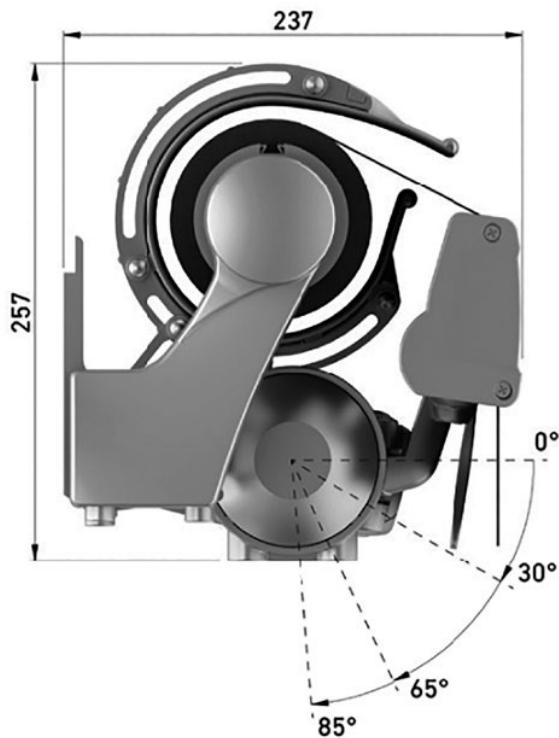

Installation to the ceiling

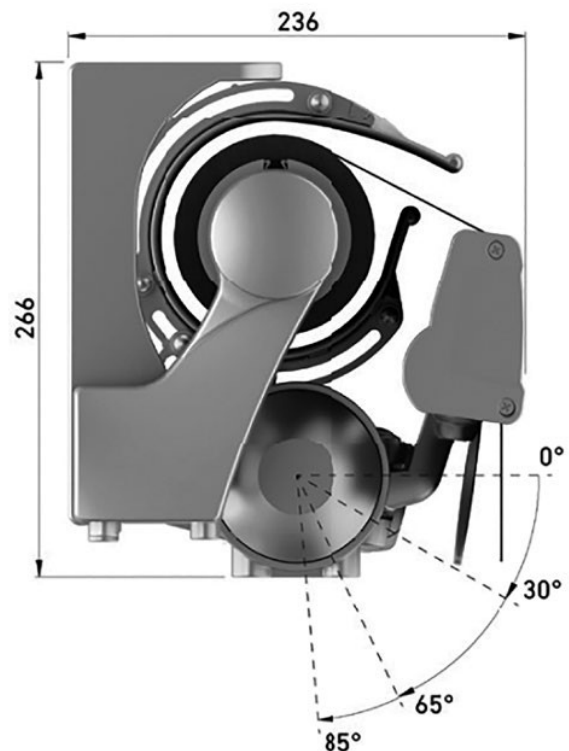

- Custom-made in Lithuania.
- Maximum width – 7 m, maximum depth – 3.5 m.
- The construction is durable and formed from aluminium.
- Technical components (stainless steel bolts, profile ends) are additionally protected with plastic caps; therefore, dust do not accumulate and insects and arachnids do not stay on the awning, not at this particular time.
- Aluminium arms are connected by a chain at hinges, so such a construction is extremely durable. Vibration-absorbing rubbers are used at the joints.
- Installing the awning is a rather simple process, while a lateral drainage system facilitates its maintenance.
- The awning can be installed to the wall or ceiling.
- Possibility to adjust the angle of inclination.
- Possibility to choose automatic or manual control.
- Wide choice of additional accessories (motor with an emergency opening, remote control, wind sensor).

